The content of component

① Hearing Aid x 1
② Rechargeable Case x 1
③ Ear Cap(Large, medium, small) x 1 / each .
④ Cleaning Brush x 1
⑤ AAA battery x 2
⑥ AC Adapter



The title of component.

Hearing Aid:

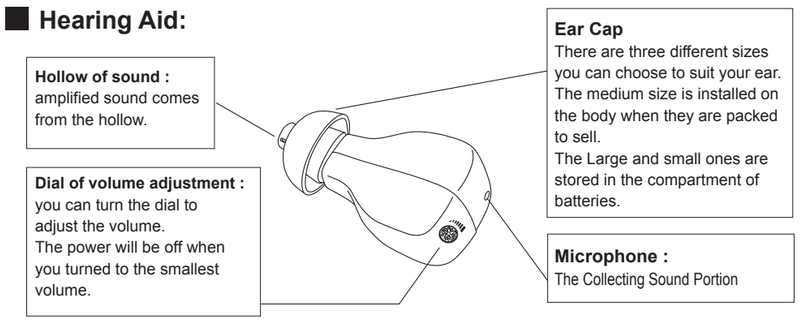
Hollow of sound :
amplified sound comes from the hollow.
Dial of volume adjustment :
you can turn the dial to adjust the volume.
The power will be off when you turned to the smallest volume.
Ear Cap
There are three different sizes you can choose to suit your ear. The medium size is installed on the body when they are packed to sell.
The Large and small ones are stored in the compartment of batteries.
Microphone :
The Collecting Sound Portion

Rechargeable Case

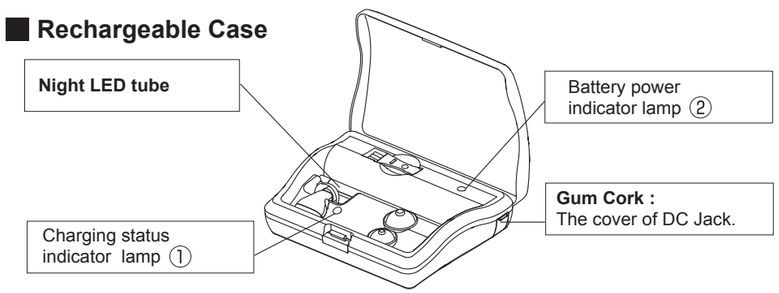

Rechargeable Lamp① • ②

(Illuminant will be shown after you open the rechargeable case)

The occasion of green illuminants comes from Lamp ① and Lamp ②	The occasion of green illuminant comes from Lamp ② only	The occasion of red illuminant comes from Lamp ②	The occasion of no ill-uminant comes from lamps.
			
Under charge: It indicates the Normal Rechargeable Condition.	It implies that either the charge is complete or the contact with the Hearing Aid is improper (please install it again in the latter state) .	It's an instruction of batt-eries replacement. Please use the AC Adapter instead or replace batteries with new ones.	The batteries are not in the compartment. Please use the AC Adapter or install two AAA batteries.

Reservation Version.

Read instructions carefully to ensure proper use and care of your rechargeable hearing aid:

To Charge: Place hearing aid in the charging case as shown.



① Insert hearing aid vertically as shown.
② Lay hearing aid down as shown by gently pushing towards the charging case cover.
③ Close charging case lid.

Note: Ensure the hearing aid is placed into proper position as shown.

Charge Status: Open the rechargeable case to see the indicator lamps



Green light on both Lamp ① and ② Lamp	Indicates proper recharging conditions. (It can't be charged while the power is off.)
Lamp ① will turn off when full charged. Green light on lamp ② only:	Indicates the charge is complete.
Lamp ② turn green light into red light.	Indicates the charging case batteries are low. Please replace the battey or use the AC adapter according to the enclosed instructions.

Note: Before and after each use.



Components Parts List

Component	Item Number	Image
Hearing Aid	10.5 x 14.4 x 24 mm	Shown with ear cap
Charging Case	96x 73 x30 mm	
Ear Cap(Large) (Consumable Parts)	55 x 50 x17 mm	 14 mm
Ear Cap(Medium) (Consumable Parts)	55 x 50 x17 mm	 12 mm
Ear Cap(Small) (Consumable Parts)	55 x 50 x17 mm	 9 mm

Please read and follow all instructions carefully. Your hearing aid is very delicate.
Debris on the ear cap may cause improper function.

Repair and replacement parts: Please contact Customer Service to request repair service or purchase consumable parts.

⚠ *Very Important Notice*

~ Recharge Any Time~

There is a rechargeable battery built inside of the hearing aid subject, for properly use under normal condition, it is able to be recharged & to discharg for 500 times. In order to extend the usage life of the rechargeable battery, here we strongly recommend users that **to put the hearing aid back to charging case for recharging whenever you don't use it.**

Please note that there is no need to recharge your hearing aid until it is almost out of power. To charge your hearing aid whenever you don't use it will be helpful to maintain the rechargeable battery & extend the usage life for recharging & discharging **up to 1000 times maximum.**

~Change the rechargeable battery for your Hearing Aid~

If your Hearing Aids can be used only for less than three hours after eight hours charged, you should contact the retail store to change the rechargeable battery in your Hearing Aid.

~Battery Low Power Sound Alert~

According to the character of rechargeable battery, when it is almost run out of power, occasionally the hearing aid will announce some slight sound as an alert to remind user recharging. Please don't treat it as any defective, just put your hearing aid back to charging case and the sound will disappear when it is properly charged.

IN4 Technology Corporation

www.in4-technology.com

service@in4-technology.com

Usage Method

The recharge method of hearing aids.

①The occasion of using alkaline AC adapter.

1. Please open the gum cork.

2. Please insert the AC ADAPTER.

3. Please observe whether the illuminant of lamp is green after you insert the socket and tum on the switch.

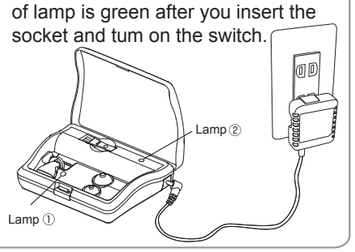

The recharge method of hearing aids.

②The occasion of using alkaline batteries.

1. Please open the lid of battery compartment.



2. Please install two AAA alkaline batteries in the compartment.



3. Please close the lid of the compartment.



The Setting method of Charge:

1. Please open the lid of the rechargeable case.



2. The power will be started by twisting the dial of volume adjustment.

It can't be charged while the power is off.



3. Please hold the Hearing Aid vertically and put into rechargeable case.



4. Please press it lightly and lay it down.



※ Please be cautious of putting the mark of ear charge in the right direction.

5. Please close the lid of rechargeable case.
6. Please observe whether the illuminants of lamps are green after you open the rechargeable case.(If the lamps are not illuminating, it implicates that either the location of placing Hearing Aid is inappropriate or the power is off.)



※The time of charge is approximately 8-12 hours. After the completion of charge, only lamp ② will illuminate. (It indicates incompletion of charge if two lamps are illuminating in the meanwhile).



Take out the Hearing Aid.

1. Please open the lid of rechargeable case.



2. Please place the Hearing Aid vertically.

3. Please take the Hearing Aid out from inside of case..



4. Please cover the lid of rechargeable case.

Switch ON / OFF The method of the volume adjustment.

1. Please press and twist the button of volume through your finger.



2. **The power will be started when you twist to the highest volume , whereas the power will off after you turn to the smallest volume.**(Please turn it off if you have finished using it.)

The method of using Hearing Aids.

1. Please turn the power on, and hold the body of Hearing Aid.

2. Please use your finger to grasp the microphone and block the hole.



3. Please put it in your ear while you are grasping it.

You will hear the buzzer ringing if you put into your ear without holding the microphone.

Maintenance Method

1. **Please clean your ear by using cotton swabs before you wear the hearing aid.**
**If the hollow of sound was clogged by your earwax, the quality of volume will be inferior.

2. Please clean out the earwax adhered on the hearing aid.
The easiest location on which earwax to be stuffed is around the hollow of sound.

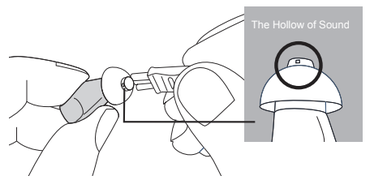

The Replacement Method of Ear Cap.

※ The EAR Cap is consumable.
If you can't remove the earwax even you've cleaned it or it has damage on the body, It's time for a replacement of your ear cap.

1. Please remove the old ear cap, and produce from the body after turn over the brim



2. Please turn over the brim of new ear cap .



3. Please install the new ear cap.



4. Please return the turnover brim to the original state.

For protecting the inner of the body , please cover the ear cap for escaping from a breakdown caused from earwax.

Storage Method:

Please keep it away from high temperature , humidity, or direct exposure under the sun. What's more,Please do not store it at the place full of corroding gas or dust.

⚠ NOTICE

* Please don't try other methods written out of the manual we enclosed.
  It may cause accidents or breakdowns
* Please don't let infants or people lacking the ability of self-expression.
  It may cause accidents or troubles
* Please don't use it while you are sleeping.
  It may cause accidents or physical discomforts.
* Please don't wear it and do the fierce exercise at the same time.
  It may cause a breakdown or damage when you dropped it accidentally.
* Please don't use this product together with your mobile phone or PHS.
  The sound will be lower or other disturbance caused because of the effect of noise resulted from radio wave.
* Please don't moisten it .If you do, please have it inspected.
  Further , please don't wear it while taking shower or washing your hair.
  Additionally, please be cautious to keep it dry while washing your face or using hair spray. Or it may cause breakdowns.

Note: Concerning the disposal of hearing aids or batteries, please obey the regulations of the local administration.

Before request for a Repair Service:

Please have an examination by yourself before sending it to our Repair Service Center.
If all methods are ineffectual, please contact the center.

Can't hear any sound :

1. Does the power switch on?
   Please twist the dial of volume adjustment and turn the power on.
2. Did the ear cap clog with earwax?
   Please use our accessory --clean brush to clean up your ear cap up.
3. Have batteries exhausted completely?
   Please replace it with new batteries or you can use AC ADAPTER to have it charged
4. Suggest the user to visit his/her physician to conduct a medical check periodically, if there is a reception problem.
5. Please fully charge unit before first time use.

SPECIFICATION & FUNCTION

General title of commodity :	Rechargeable Hearing Aid with earhole style.
Purpose & Function :	For assisting people of hearing obstacle to live as normal people.
Title of Commodity / Item Number :	Hearing Aid / ClaritasAlpha
Standard Frequency :	2500Hz
Max.output sound level gain	29±5dB 0~29dB
Highest sound pressure level for input SPL 90dB :	118±5dB below 125dB
Equivalent input noise level:	Below 29dB
Total Harmonic distortion value of reality : 2500Hz: below 3%;800Hz:below 4%;500Hz:below 4%	
Battery Current :	Below 0.8mA/2.5V
Battery Type/life expectancy:	Button size Rechargeable Battery. Continuous use: 6~10 hours /each recharged time. 500 times in total,(it may be different because of depending on what level of volume you use.)
Suitable Object:	Slight obstacle of hearing.
Operating temperature/ humidity :	+10°C ~ +40°C ,30% ~ 85% RH
Storage temperature / humidity :	-10°C to +60°C ,30% ~ 85% RH
Size:	<Hearing Aid> 10.5mm(L)x14.4(W)x24.0mm(H) <Rechargeable Case>96.0(L)x 73.0(W)x 30.0mm(H)
Weight :	<Hearing Aid>2.4g <Rechargeable Case>67g
Material :	<Hearing Aid> ABS, <Rechargeable Case>ABS <Ear Cap> silicone, <AC Adapter>ABS

CE 0434 FDA